


Motorola's highest performance VMEbus single-board computer

The MVME5500 is the latest flagship of the Motorola VME product line, enabling higher levels of performance in a single VMEbus slot. The MVME5500 utilizes the latest MPC7455 processor running at 1 GHz, which is ideal for data intensive applications.

The MVME5500 provides more than just better processor performance; it also provides balanced performance from the processor, memory, dual independent local buses and I/O subsystems. The powerful Marvell system controller, with support for a 133 MHz host bus and a 133 MHz SDRAM memory bus, is well matched to the high speed processor. To match the system I/O to the outstanding processor performance, the MVME5500 provides dual 64-bit, 33/66 MHz PCI buses. Each PCI bus has a PMC site supporting cards running at 33 or 66 MHz. The Universe II VME interface and PMCspan connector are isolated from the PMC sites on a dedicated 33 MHz PCI bus segment so that both PMC sites are capable of 66 MHz operation. The MVME5500 also offers a Gigabit Ethernet interface, a 10/100BaseTX Ethernet interface and two serial ports. All of this adds up to a set of well-balanced, high-performance subsystems for unparalleled performance.

The MVME5500 series is designed to meet the needs of OEMs including those in defense and aerospace, industrial automation and medical imaging market segments. Customers looking for a "technology refresh" for their application while maintaining backward compatibility with their existing VMEbus infrastructure can upgrade to the MVME5500 series and take advantage of the enhanced performance features.

- MPC7455 PowerPC® processor at 1 GHz
- 256KB of on-chip L2 cache and 2MB of L3 cache
- AltiVec™ coprocessor for high-performance computational applications
- 512MB of on-board 133 MHz SDRAM ECC memory and 512MB additional memory via a memory mezzanine card for a total of 1GB of memory
- Two banks of soldered Flash memory, 32MB and 8MB
- Dual independent 64-bit PCI buses and PMC sites with a bus speed of up to 66 MHz
- Gigabit Ethernet interface plus an additional 10/100BaseTX Ethernet interface
- 64-bit PCI expansion mezzanine connector allowing up to four more PMCs
- I/O compatibility with MVME51xx family
- Single VME slot even when fully configured with two PMC modules or one PMC module and an add-on memory mezzanine
- Support for processor PMCs (PrPMCs)

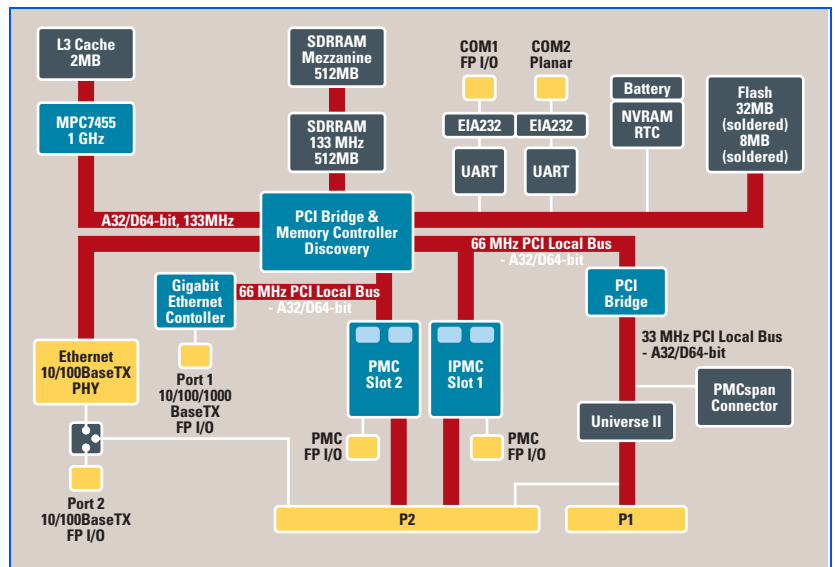

Backward Compatibility

The MVME5500 continues the direction that Motorola started with the MVME5100 series of providing a migration path from Motorola's embedded controllers and single-board computers (SBCs) to a single platform. This migration path enables OEMs to support varying I/O requirements with the same base platform, simplifying part number maintenance, technical expertise requirements and sparing.

The MVME5500 series offers customers a migration path from the MVME2300, MVME2400, MVME2600, MVME2700 and MVME5100 boards to allow them to take advantage of features such as the MPC7455 processor, Gigabit Ethernet and dual independent 33/66 MHz PMC sites.

IPMC Modules

The IPMC761 and IPMC712 are optional add-on PMC modules that provide backward compatibility with previous generation Motorola products (such as MVME2600, MVME2700 and MVME5100 in IPMC mode) using the MVME761 or MVME712M transition module. IPMC modules provide rear I/O support for the following:

- One single-ended Ultra Wide SCSI port
- One parallel port
- Four serial ports (two or three async and one or two sync/async, depending on module)

With an IPMC installed, one PMC slot is still available, providing support for OEM product customization.

P2 I/O Modes

Like the MVME5100 series, the MVME5500 series supports two, jumper-configurable P2 I/O modes: PMC mode and IPMC mode. PMC mode is backward compatible with the MVME2300/MVME2400 and MVME5100 in PMC mode. In PMC mode, 64 pins from PMC slot 1 and 46 pins from PMC slot 2 are available on P2 for PMC rear I/O. In IPMC mode, the MVME5500 series supports legacy MVME761 or MVME712M I/O modules (with limited PMC I/O) when an IPMC761 or IPMC712 PMC card is populated in PMC slot 1. In this configuration, PMC slot 2 contains some signals that are reserved for extended SCSI.

Transition Modules***MVME761***

The MVME761 transition module provides industry-standard connector access to the IEEE 1284 parallel port, a 10BaseT or 100BaseT port via an RJ-45 connector, two DB-9 connectors providing access to the asynchronous serial ports configured as EIA-574 DTE and two HD-26 connectors providing access to the sync/async serial ports. These serial ports, labeled as Serial 3 and Serial 4 on the faceplate of the MVME761, are individually user-configurable as EIA-232, EIA-530, V.35, or X.21 DCE or DTE via the installation of Motorola Serial Interface Modules (SIMs).

A P2 adapter board provides interface signals to the MVME761 transition module. Two separate P2 adapter boards are available: one for 3-row backplanes and one for 5-row backplanes. The 3-row P2 adapter board provides connection for 8-bit SCSI. A 5-row P2 adapter board supports 16-bit SCSI and PMC I/O.

MVME712M

The MVME712M transition module provides industry-standard connector access to the Centronics parallel port, a narrow SCSI port, and four DB-25 connectors providing access to the asynchronous/synchronous serial ports jumper configurable as EIA-232 DCE or DTE. A P2 adapter board provides interface signals to the MVME712M transition module. The 3-row P2 adapter board also provides connection for 8-bit SCSI.

To gain access to the additional user-definable I/O pins provided via the 5-row VME64 extension connector, a special P2 adapter board is available. This adapter panel replaces the traditional 3-row P2 adapter board and extends its capability by providing access to the PMC I/O pins.

Software Support

Firmware Monitor

Firmware must fulfill the traditional functions of power-on self-test (POST), initialization, low-level setup and debug, and operating system booting. Motorola's innovative firmware (known as MOTLoad) that is resident on the MVME5500 exceeds these requirements with expanded features such as interrupt driven I/O, more comprehensive power-up tests and extensive diagnostics with new scripting capability. And of course, MOTLoad provides a debugger interface similar to the time proven "BUG" interface on previous VMEbus boards from Motorola.

Operating Systems and Kernels

WindRiver Systems VxWorks, TimeSys Linux, Green Hills Software INTEGRITY and LynuxWorks LynxOS are available for the MVME5500.

Libraries

VS1/Pro VS1PL libraries from MPI Software Technology are available on the MVME5500.

SPECIFICATIONS

Processor

Microprocessor:	MPC7455
Clock Frequency:	1 GHz
On-chip L1 Cache (I/D):	32KB/32KB
On-chip L2 Cache (I/D):	256KB
L3 Cache:	2MB

System Controller

Marvell GT-64260B

Main Memory

Type:	PC133 ECC SDRAM
Speed:	133 MHz
Capacity:	512MB on-board, expandable to 1GB with add-on memory mezzanine card. Note: If a PMC module is plugged into PMC slot 1, the memory mezzanine card cannot be used because the PMC module covers the memory mezzanine connector.
Configurations:	512MB in two banks

Flash Memory

Type:	EEPROM, on-board programmable
Capacity:	40MB total in two banks of 32MB and 8MB, both soldered
Write Protection:	32MB of surface-mount Flash is write-protectable via jumper

NVRAM

Capacity:	32KB (4KB available for users)
Cell Storage Life:	50 years at 55° C
Cell Capacity Life:	5 years at 100% duty cycle, 25° C
Removable Battery:	Yes

Counters/Timers

TOD Clock Device:	M48T37V
Real-Time Timers/Counters:	Eight, 32-bit programmable
Watchdog Timer:	Time-out generates reset

VMEbus Interface: ANSI/VITA 1-1994 VME64 (IEEE STD 1014)

Controller:	Tundra Universe II
DTB Master:	A16-A32; D08-D64, SCT, BLT
DTB Slave:	A24-A32; D08-D64, BLT, UAT
Arbiter:	RR/PRI
Interrupt Handler/Generator:	IRQ 1-7/Any one of seven IRQs
System Controller:	Yes, jumperable or auto detect
Location Monitor:	Two, LMA32

Ethernet Interfaces

Port 1

Controller:	Intel 82544EI Gigabit Ethernet controller
Interface Speed:	10/100/1000Mb/s
Connector:	Routed to front panel RJ-45

Port 2

Controller:	Controller integrated into GT-64260B system controller
Interface Speed:	10/100Mb/s
Connector:	Routed to front panel RJ-45 or optionally routed to P2, RJ-45 on MVME761

Asynchronous Serial Ports

Controller:	Two TL16C550C UARTs
Number of Ports:	Two, 16550 compatible
Async Baud Rate, b/s max.:	38.4K EIA-232, 115Kb/s raw
Connector:	Routed to front panel RJ-45; one on planar for development use

Dual IEEE P1386.1 PCI Mezzanine Card Slots

Address/Data:	A32/D32/D64, PMC PN1, PN2, PN3, PN4 connectors
PCI Bus Clock:	33/66 MHz
Signaling:	3.3V or 5V, configurable with keying pin
Power:	+3.3V, +5V, $\pm 12V$
Module Types:	Two single-wide or one double-wide, front panel or P2 I/O, PMC and PrPMC support

Note: If a PMC module is plugged in PMC slot 1, the memory mezzanine card cannot be used because the PMC module covers the memory mezzanine connector.

PCI Expansion Connector

Address/Data:	A32/D32/D64
PCI Bus Clock:	33 MHz
Signaling:	5V
Power:	+3.3V, +5V, $\pm 12V$
Connector:	114-pin connector located on MVME5500 planar, same location as on MVME5100 planar

Power Requirements

	+5V $\pm 5\%$
MVME5500-0163:	6.7 A typ., 8.0 A max.
MVME5500-0163 with memory mezzanine:	7.5 A typ., 9.0 A max.
MVME5500-0163 with IPMC712/761:	7.6 A typ., 9.2 A max.

Note: In a 3-row chassis, PMC current should be limited to 19.8 watts (total of both PMC slots). In a 5-row chassis, PMC current should be limited to 46.2 watts (total of both PMC slots).

Board Size

Height:	233.4 mm (9.2 in.)
Depth:	160.0 mm (6.3 in.)
Front Panel Height:	261.8 mm (10.3 in.)
Width:	19.8 mm (0.8 in.)
Max. Component Height:	14.8 mm (0.58 in.)

IPMC Modules

PMC Interface

Address/Data:	A32/D32/D64, PMC PN1, PN2, PN3, PN4 connectors
PCI Bus Clock:	33 MHz
Signaling:	5V
Module Type:	Basic single-wide; P2 I/O

SCSI Bus

Controller:	Symbios 53C895A
PCI Local Bus DMA:	Yes, with PCI local bus burst
Asynchronous (8-bit mode):	5.0MB/s
Ultra SCSI:	20.0MB/s (8-bit mode), 40.0MB/s (16-bit mode)

Note: 16-bit SCSI operation precludes the use of some PMC slot 2 signals.

Synchronous Serial Ports

Controller:	85230/8536
Number of Ports:	Two (IPMC761); one (IPMC712)
Configuration:	IPMC761: TTL to P2 (both ports), SIM configurable on MVME761; IPMC712: EIA-232 to P2
Baud Rate, bps max.:	2.5M sync, 38.4K async
Oscillator Clock Rate (PCLK):	10 MHz/5 MHz

Asynchronous Serial Ports

Controller:	16C550 UART; 85230/8536
Number of Ports:	Two (IPMC761); three (IPMC712)
Configuration:	EIA-574 DTE (IPMC761); EIA-232 (IPMC712)
Async Baud Rate, b/s max.:	38.4K EIA-232, 115Kb/s raw

Parallel Port

Controller:	PC97307
Configuration:	8-bit bi-directional, full IEEE 1284 support; Centronics compatible (minus EPP and ECP on MVME712M)
Modes:	Master only

Power Requirements

(Additional power load placed on MVME5500 with IPMC installed)

	IPMC761	IPMC712
+5V:	0.5 A max.	0.5 A max.
+3.3V:	0.75 A max.	0.75 A max.

Transition Modules**I/O Connectors**

	MVME761	MVME712M
Asynchronous Serial Ports:	Two, DB-9 labeled as COM1 and COM2	Three, DB-25 labeled as Serial 1, Serial 2, and Serial 3
Synchronous Serial Ports:	Two HD-26 labeled as Serial 3 and Serial 4 (user-configurable via installation of SIMs), Two 60-pin connectors on MVME761 planar for installation of two SIMs	One, DB-25 labeled as Serial 4
Parallel Port:	HD-36, Centronics compatible	D-36, Centronics compatible
Ethernet:	10BaseT or 100BaseT, RJ-45	NA
SCSI:	8- or 16-bit, 50- or 68-pin connector via P2 adapter	8-bit, standard SCSI D-50

Board Size

Height:	233.4 mm (9.2 in.)
Depth:	80.0 mm (3.1 in.)
Front Panel Height:	261.8 mm (10.3 in.)
Front Panel Width:	MVME761: 19.8 mm (0.8 in.) MVME712M: 39.6 mm (1.6 in.)

All Modules**Environmental**

	Operating	Non-operating
Temperature:	0° C to +55° C (inlet air temp. w/forced air cooling)	-40° C to +85° C
Vibration:		1 G sinusoidal, 5–100 Hz 2 axes

Safety

All printed wiring boards (PWBs) are manufactured with a flammability rating of 94V-0 by UL recognized manufacturers.

Electromagnetic Compatibility (EMC)

Intended for use in systems meeting the following regulations:

U.S.: FCC Part 15, Subpart B, Class A (non-residential)

Canada: ICES-003, Class A (non-residential)

Motorola Computer Group board products are tested in a representative system to the following standards, results pending for configurations with IPMC712:

CE Mark per European EMC Directive 89/336/EEC with Amendments; Emissions: EN55022 Class A; Immunity: EN55024

ORDERING INFORMATION

Part Number	Description
MVME5500-0161	1 GHz MPC7455 PowerPC processor, 512MB SDRAM, Scanbe handles
MVME5500-0163	1 GHz MPC7455 PowerPC processor, 512MB SDRAM, IEEE handles
Memory	
RAM5500-007	512MB memory mezzanine expansion card
Related Products	
IPMC712-001	Multifunction rear I/O PMC module; 8-bit SCSI, Ultra Wide SCSI, one parallel port, three async and one sync/async serial ports
MVME712M	Transition module with one DB-25 sync/async serial port, three DB-25 async serial port, one AUI connector, one D-36 parallel port, and one 50-pin 8-bit SCSI; includes 3-row DIN P2 adapter board and cable
IPMC761-001	Multifunction rear I/O PMC module; 8-bit SCSI, one parallel port, two async and two sync/async serial ports
MVME761-001	Transition module with two DB-9 async serial port connectors, two HD-26 sync/async serial port connectors, one HD-36 parallel port connector, one RJ-45 10/100 Ethernet connector; includes 3-row DIN P2 adapter board and cable (for 8-bit SCSI)
MVME761-011	Transition module with two DB-9 async serial port connectors, two HD-26 sync/async serial port connectors, one HD-36 parallel port connector, one RJ-45 10/100 Ethernet connector; includes 5-row DIN P2 adapter board and cable (for 16-bit SCSI); requires backplane with 5-row DIN connectors
PMCS PAN1-002	Primary PMCS PAN-002 with original VME Scanbe ejector handles
PMCS PAN1-010	Secondary PMCS PAN-010 with original VME Scanbe ejector handles
Documentation	
V5500A/IH	MVME5500 Single-Board Computer Installation and Use
V5500A/PG	MVME5500 Single-Board Computer Programmer's Reference Guide
VME761A/IH	MVME761 Transition Module Installation and Use
VME712MA/IH	MVME712M Transition Module Installation and Use
MOTLODA/UM	MOTLoad Firmware Package User's Manual
VIPMCA/IH	IPMC712/761 I/O Module Installation and Use
PMCS PAN A/IH	PMCSpan PMC Adapter Carrier Board Installation and Use
Documentation is available for online viewing and ordering at http://www.motorola.com/computer/literature	

**Motorola Computer Group
Regional Offices**

NORTH AMERICA: Tempe, AZ 1 800 759 1107 or +1 602 438 5720
 EUROPE: Loughborough, UK +44 1509 634300
 EAST MEDITERRANEAN: Tel Aviv, Israel +972 3 568 4388

ASIA: Shanghai, China +86 21 5292 5693
 PACIFIC RIM: Tokyo, Japan +81 3 5424 3101
 ASIA/PACIFIC: Hong Kong +852 2966 3210



www.motorola.com/computer

MOTOROLA and the Stylized M Logo are registered in the U.S. Patent and Trademark Office. PowerPC is a trademark of IBM Corp. and used under license. All other product or service names are the property of their respective owners.
 © Motorola Inc. 2003, 2002

This datasheet identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Motorola may sell products. A prospective buyer should exercise its own independent judgement to confirm the suitability of the products for particular applications. Motorola reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Motorola's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.